


W-600 Triplex Plunger Pump

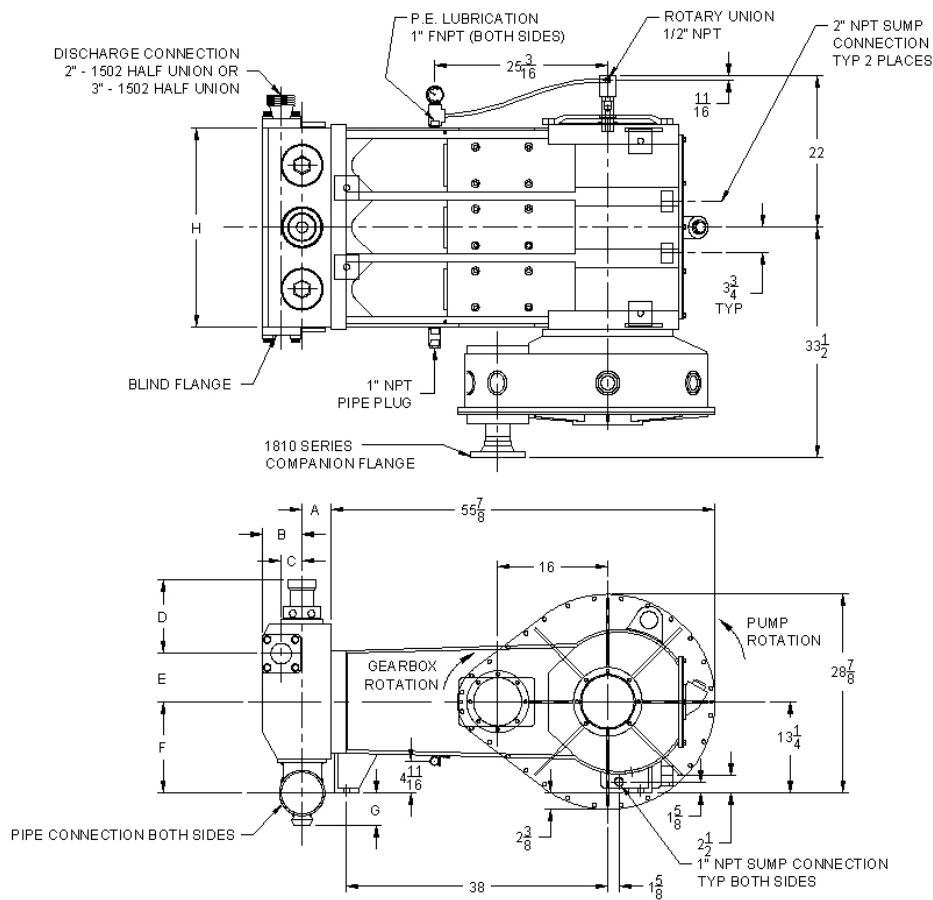

SPECIFICATIONS:

Pump Type:

Horizontal Reciprocating Power Pump. Positive Displacement with Single-Acting Plungers

Maximum Input Horsepower:

600 Intermittent, 250 Continuous

Stroke Length: 6 inches

Maximum Rod Load: 100,000 lbs.

Approximate Weight: 5,000 lbs.

Pump Power End:

Fabricated of High Strength Steel

Gears: Helical, External Gearbox

Gear Ratio: 4.68:1

Rod Bearings: Shell Type Replaceable

Main Bearings: Straight Roller

Pinion Bearings: Tapered Roller

Crankshaft: One Piece Forged Alloy Steel

Connecting Rod: Cast Steel

Crosshead Guide: Cast Iron

Fluid End:

Plunger Type Monoblock Design.
Machined From High Strength Alloy Steel,
Heat Treated and Ultrasonic Tested

Plunger Diameter: 2.75 to 5 inches

Discharge Outlet: 2-inch 1502 Half Union Forged Steel Connection - Either Side

Suction Inlet: 4 or 6-inch Standard Pipe

Valves and Seats:

Hardened Steel, Replaceable Inserts

Power End Lubrication:

18 GPM Required, Optional Hydraulic
Lubrication
System w/ Sump Available

Flange Connections

Discharge Connection Sizes	Suction Connection Sizes
2 (50.8) 1502 Half Union	4 (101.6) Grooved Pipe
3 (76.2) 1502 (Optional)	6 (152.4) Optional
2 (50.8) 1502 Half Union	4 (101.6) Grooved Pipe

Pump Model W-600 FE Size:	Dimensions (inches)							
	A	B	C	D	E	F	G	H
2 3/4 - 3	4 1/2	5 1/2	2 3/8	8 3/4	5 3/8	11 1/4	4 3/4	27 1/2
3 1/2 - 4	4 1/8	6 1/4	3 1/8	9 9/32	6 1/8	12 3/8	4 3/4	27 5/8
4 1/2 - 5	4 3/8	6	3 1/32	10 13/16	7	13 1/4	4 3/4	29

W-600 Triplex Plunger Pump

National Oilwell Varco W-600 INTERMITTENT DUTY PERFORMANCE CHART 2 3/4 " TO 5 " X 6 " SINGLE ACTING TRIPLEX PLUNGER PUMP

ENGLISH UNITS

PLUNGER DIAMETER	DISPLACEMENT FACTORS @ 100% VOLUMETRIC EFFICIENCY	PUMP SPEED IN CRANKSHAFT REVOLUTIONS PER MINUTE (RPM)									
		50		100		200		300		450	
		CAPACITY @ 100% VE**	DISCHARGE PRESSURE	CAPACITY @ 100% VE**	DISCHARGE PRESSURE	CAPACITY @ 100% VE**	DISCHARGE PRESSURE	CAPACITY @ 100% VE**	DISCHARGE PRESSURE	CAPACITY @ 100% VE**	DISCHARGE PRESSURE
	U.S. GALLONS PER REVOLUTION	US GALLONS PER MINUTE	MAXIMUM @ CAPACITY	US GALLONS PER MINUTE	MAXIMUM @ CAPACITY	US GALLONS PER MINUTE	MAXIMUM @ CAPACITY	US GALLONS PER MINUTE	MAXIMUM @ CAPACITY	US GALLONS PER MINUTE	MAXIMUM @ CAPACITY
INCHES	GPR	GPM	PSIG	GPM	PSIG	GPM	PSIG	GPM	PSIG	GPM	PSIG
5	1.530	76	5093	153	5041	306	3025	459	2016	688	1344
4.5	1.239	62	6288	124	6224	248	3734	372	2489	558	1660
4	0.979	49	7958	98	7877	196	4726	294	3151	441	2100
3.5	0.750	37	10394	75	10288	150	6173	225	4115	337	2744
3	0.551	28	14147	55	14003	110	8402	165	5601	248	3734
2.75	0.463	23	16836	46	16665	93	9999	139	6666	208	4444
INPUT POWER @ 90% ME***	BHP	297		500		600		600		600	
PINION RPM @ 4.68 to 1 Gear Ratio		234		468		936		1404		2106	

** Volumetric Efficiency

*** Mechanical Efficiency

METRIC UNITS

PLUNGER DIAMETER	DISPLACEMENT FACTORS @ 100% VOLUMETRIC EFFICIENCY	PUMP SPEED IN CRANKSHAFT REVOLUTIONS PER MINUTE (RPM)									
		50		100		200		300		450	
		CAPACITY @ 100% VE**	DISCHARGE PRESSURE	CAPACITY @ 100% VE**	DISCHARGE PRESSURE	CAPACITY @ 100% VE**	DISCHARGE PRESSURE	CAPACITY @ 100% VE**	DISCHARGE PRESSURE	CAPACITY @ 100% VE**	DISCHARGE PRESSURE
	LITRES per REV	LITRES per MIN	MAXIMUM @ CAPACITY	LITRES per MIN	MAXIMUM @ CAPACITY	LITRES per MIN	MAXIMUM @ CAPACITY	LITRES per MIN	MAXIMUM @ CAPACITY	LITRES per MIN	MAXIMUM @ CAPACITY
mm	LPR	LPM	kPa	LPM	kPa	LPM	kPa	LPM	kPa	LPM	kPa
127	5.8	290	35116	580	34759	1159	20855	1739	13904	2608	9269
114.3	4.7	235	43353	469	42912	939	25747	1408	17165	2112	11443
101.6	3.7	185	54869	371	54311	742	32587	1113	21724	1669	14483
88.9	2.8	142	71665	284	70937	568	42562	852	28375	1278	18916
76.2	2.1	104	97544	209	96553	417	57932	626	38621	939	25747
69.9	1.8	88	116086	175	114906	351	68943	526	45962	789	30642
INPUT POWER @ 90% ME***	KW	222		373		447		447		447	
PINION RPM @ 4.68 to 1 Gear Ratio		234		468		936		1404		2106	

** Volumetric Efficiency

*** Mechanical Efficiency

The information and data on this sheet is accurate to the best of our knowledge and belief, but are intended for general information only. Applications suggested for the materials are described only to help readers make their own evaluations and decisions, and are neither guarantees nor to be construed as express or implied warranties of suitability for these or other applications. National Oilwell Varco makes no warranty either express or implied beyond that stipulated in National Oilwell Varco Standard Terms and Conditions of Sale.

www.nov.com / mission.sales@nov.com



10000 Richmond Avenue, Houston, Texas 77042
Phone: 713 346 7500 • Fax: 713 435 2195

© 2005 National Oilwell Varco
D391000170-MKT-001 Rev. 02